

SharkBite® PEX Support Liner Removal

Purpose

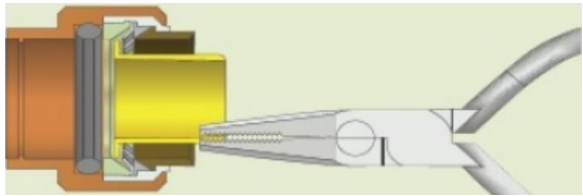
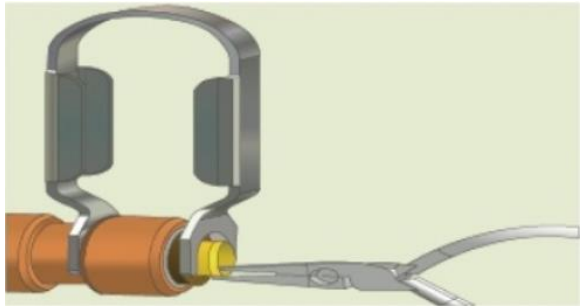
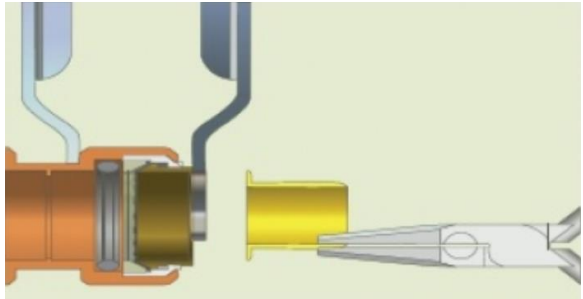
The tube liner within a SharkBite® Plumbing Fitting is to be removed if connected to copper. All Platinum installations must remove the liner.

Safety

- Protective glasses
- Gloves
- Other measures as required by the site

Tools Required:

- SharkBite® disconnect tongs
- Needle nose pliers

Step (picture)	Step (Instructions)
<p>Step 1</p> 	<p>Gently move the Tube Support Liner until it is past the O-ring and is held by the grab ring. At this point the Tube Support liner cannot be pulled any further.</p>
<p>Step 2</p> 	<p>Place the disconnect tongs as shown and squeeze them together. Squeezing the disconnect tongs will spread the teeth of the grab ring.</p>
<p>Step 3</p> 	<p>While squeezing the tongs, use the needle nose pliers to fully remove the Tube Support Liner.</p>